


electrode tip dresser **BF 2401...**

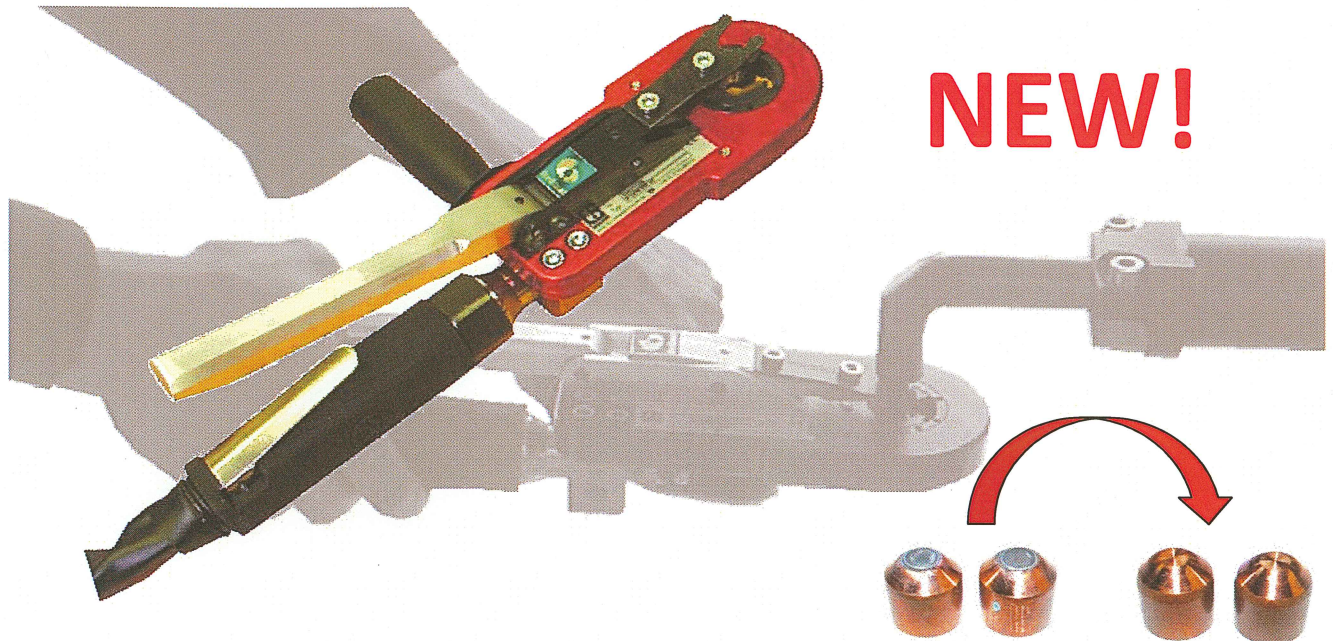

pneumatically driven electrode tip dresser with lever deflection

consisting of:

- gear
- pneumatic drive
- handgrip
- connecting hose + quick release incl. fixings
- lever deflection
- without milling head!

ordering example:

F-2401.000.00

The required milling head have to be ordered separately!

We offer an assortment of almost 300 different milling heads!

The **BF 2401...** is particularly to dress electrode caps from manual welding guns.

Advantage: dress only one side (upper or lower electrode)

You press the electrode with the lever deflection into the milling head.

You also can use this electrode tip dresser for spot welding machines or similarly designed facilities.

The minimum opening dimension between upper and lower electrode must be 20mm.

weight:	ca. 2,5 Kg
torque:	90 Nm
number of revolutions:	170 min ⁻¹
compressed air connection:	5,5 - 6,3 bar